


**VinylShield™ A**  
 Mineral Fiber Ceilings



LOW VOC

\$\$\$

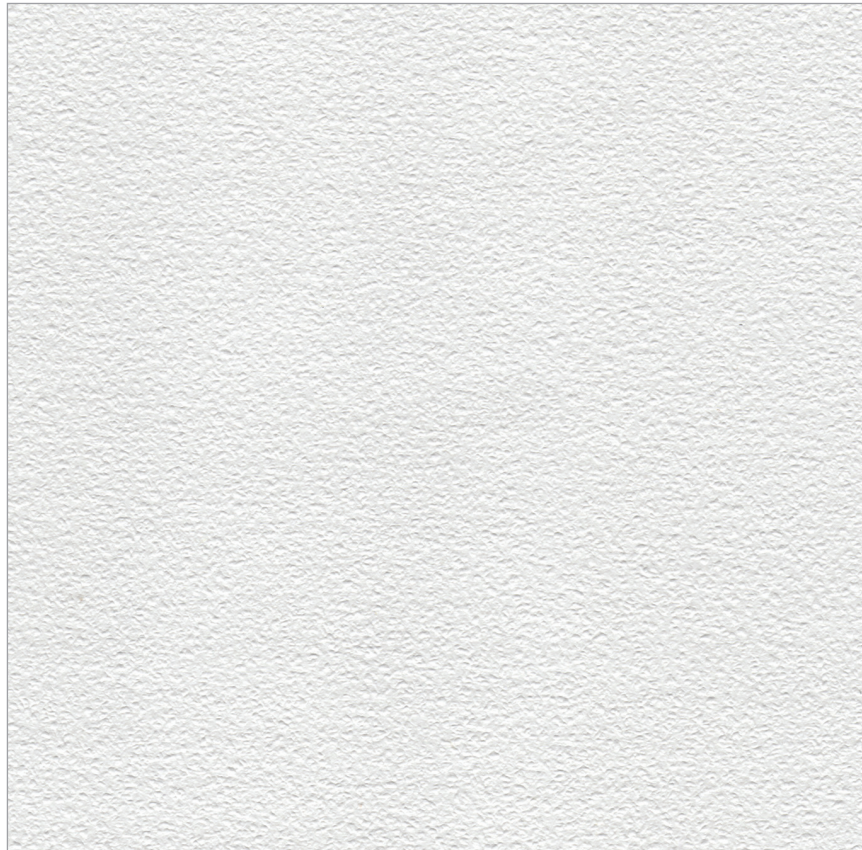

**LEED® v4**

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

● IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting

● EA: Prereq. Min. Energy Performance

● EA: Optimize Energy Performance

● Recycled Content  
 Pre: **34%** | Post: **1%**

**TOOLS**

Visit [CertainTeed.com/Ceilings](http://CertainTeed.com/Ceilings)  
 Download HPDs and EPDs  
 LEED® Information / BIM Objects  
 3-Part Specs / Data Pages



Recycled Content



HPD Available

**FEATURES & BENEFITS**

- Designed for sanitary and clean room applications or where low particle emissions and maximum cleanliness are required
- Exceeds FGI guidelines for cleanability
- Tested to 2,000+ wash cycles with chemical cleaners/sanitizers
- Satisfies USDA/FSIS guidelines for sanitary applications
- Approved for use in federally registered Canadian food establishments
- Suited as a clean room class 5 component
- Vinyl facing provides an easy-to-clean, abuse- and stain-resistant ceiling perfect for restrooms, laboratories, hospitals and sanitary food service areas
- Health Product Declaration (HPD) available for this product

**APPLICATIONS**

- Clean Rooms
- Food Preparation Areas
- Sterilization Areas
- Restaurants
- Laboratories
- Other Commercial Buildings / Space Applications

**AVAILABLE EDGE DETAILS**



Trim  
 15/16 Grid



VinylShield™ A Trim (1102-CRF-1)

## ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	NRC	CAC	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	WASHABLE WITH SANITIZING CHEMICALS	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
<b>VINYLSHIELD™ A</b>													
<b>1100-CRF-1</b>	24 x 48 x 5/8	Trim	—	41	Yes	Yes	BioShield	0.78	Yes	Yes	Class A	Certified	35%
<b>1102-CRF-1</b>	24 x 24 x 5/8	Trim	—	39	Yes	Yes	BioShield	0.78	Yes	Yes	Class A	Certified	35%

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

## PHYSICAL DATA

### MATERIAL

Mineral Fiber

### ASTM E1264 CLASSIFICATION

Type IV, Form 2, Pattern G

### FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102  
Flame Spread: 25 or less  
Smoke Developed: 50 or less

### VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

### MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

### MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Cleanable with sanitizing chemicals.

### WARRANTY

10-year 104/90 Limited Warranty