


Theatre® Black f
 Fiberglass Ceilings

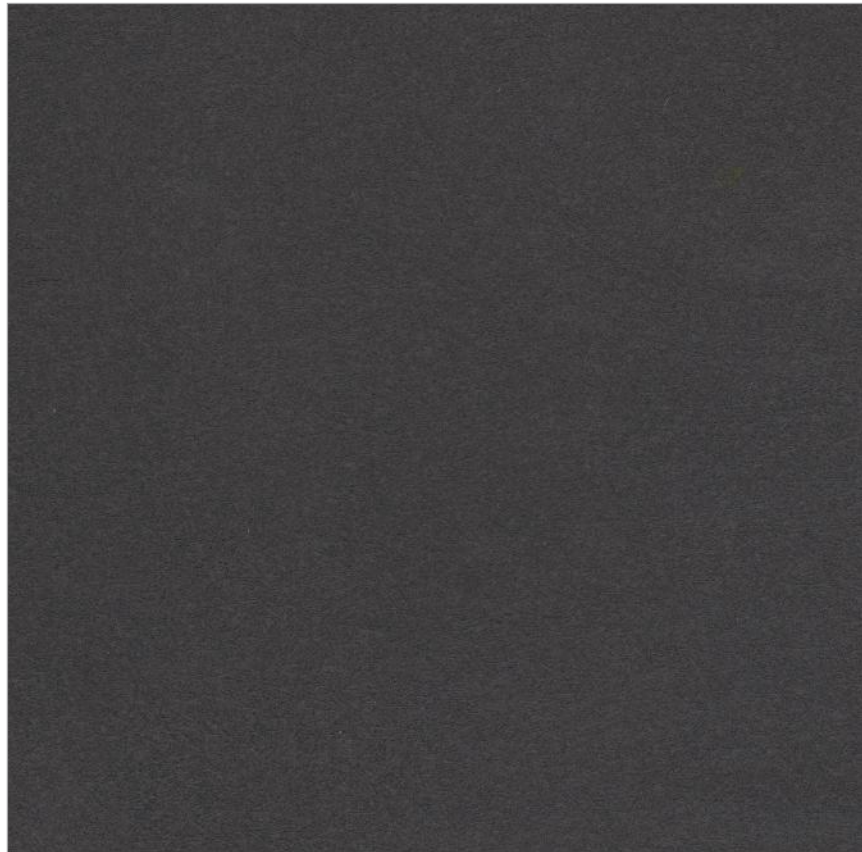

\$\$\$

LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content
 Pre: **0%** | Post: **33%**

TOOLS

Visit CertainTeed.com/Ceilings
 Download HPDs and EPDs
 LEED® Information / BIM Objects
 3-Part Specs / Data Pages



Recycled Content

FEATURES & BENEFITS

- Specifically developed to meet acoustical requirements for theater applications
- Matte finish provides extremely low surface reflectivity
- High humidity and inherent mold resistance are perfect for high volume spaces

APPLICATIONS

- Theaters
- School Auditoriums
- Dark Rooms
- Projection Rooms
- Commercial Interior Spaces
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS












Trim
 15/16 Grid



Theatre® Black f Trim (1912-THB-5)

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	 NRC	 CAC+	 SAG RESISTANT	 MOLD RESISTANT	 LR	 WASHABLE	 FIRE CLASS (ASTM E1264)	 LOW VOC EMISSION COMPLIANT	 RECYCLED CONTENT
THEATRE® BLACK F											
1912-THB-5	24 x 24 x 5/8	Trim	0.75	20	Yes	Inherent	0.03	—	Class A	—	33%
1910-THB-5	24 x 48 x 5/8	Trim	0.75	20	Yes	Inherent	0.03	—	Class A	—	33%
1942-THB-5	24 x 24 x 1	Trim	0.90	25	Yes	Inherent	0.03	—	Class A	—	33%
1940-THB-5	24 x 48 x 1	Trim	0.90	25	Yes	Inherent	0.03	—	Class A	—	33%

+CAC values with foil backing

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

MATERIAL
Fiberglass

ASTM E1264 CLASSIFICATION
Type XII, Form 2, Pattern E

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

MOLD/MILDEW RESISTANCE
Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY
10-year 104/95 Limited Warranty

Technical Support | certainteed.com/ceilings 800-233-8990
© 05/18 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings